



The ultimate generation of safe and reliable lithium-ion cell The new NCR18650BD-Improved

Maximum safety and superior performance

Stable performance over a range of discharge rate

Low self discharge

High reliability and long life

No need for State of Health (SOH) check*

High energy density and cost efficiency

**In case of 4.15V charge at the beginning*



Reduced human risk and
damage risk positions
your applications as
smarter and safer choice



Higher cost effectiveness
in terms of electronic and
charging system as SOH
check is not required



Safe 'Fit and Forget' solution

Panasonic's new NCR18650BD-Improved is suitable for a wide range of applications offering unbeatable performances, cycle life and safety. It demonstrates stable performance over a wide range of discharge rate and temperature.

By being charged at 4.15V from the start, the improved BD cells do not need State of Health (SOH) check neither a reduction in the charging voltage. Therefore, the application of this cell gives you an edge in the cost reduction related to electronic and charging system.

NCR18650BD-Improved: Mobility Application



Panasonic has various line-up of cylindrical cell for motive application.

Model	NCR18650PF	NCR18650BD (improved)		NCR18650GA
		Use Case 1	Use Case 2	
Feature	Standard	High Energy / Long Life	High Energy / Long Life	High Energy
Nominal Voltage (V)	3.6	3.6	3.6	3.6
Rated Capacity (mAh) at 20°C	2700	2910	2980	3300
Capacity (mAh) at 25°C	min	2750	2935	3350
	typ.	2900	3080	3450
Energy (Wh)	typ.	10.4	11.1	12.4
Standard Charge	0.5C-4.2V*	0.3C-4.15V 0.5C @ 25°C-45°C	0.3C-4.2V *	0.5C-4.2V *
Cycle Life	●●●○	●●●●●	●●●●●	●●●
Life End Control	Reduce charge from 4.2V to 4.15V by SOH 70%	No Need	Reduce charge from 4.2V to 4.15V by SOH 70%	Reduce charge from 4.2V to 4.15V by SOH 70%
Max. Cont. Discharge Current (A)	8	8	8	8
Discharge End Voltage (V)	2.5	2.5	2.5	2.5
Impedance / Resistance (mΩ)	AC (1kHz) SOC50%	24	24	24
	DC (0.1-1t) SOC50%	44	44	44
Capacity (mAh) at 25°C	Diameter	18.5	18.5	18.5
	Height	65.3	65.3	65.3
Weight (g) (max.) (with tube)	48	49.5	49.5	49.5
Energy density (without tube)	Volumetric (Wh/l)	577	613	698
	Gravimetric (Wh/kg)	203	211	240



*Need life end control (reduce charge from 4.2V to 4.15V by SOH 70%)

Discharge characteristics for mobility application

Stable performance over a wide range of discharge rate and temperature

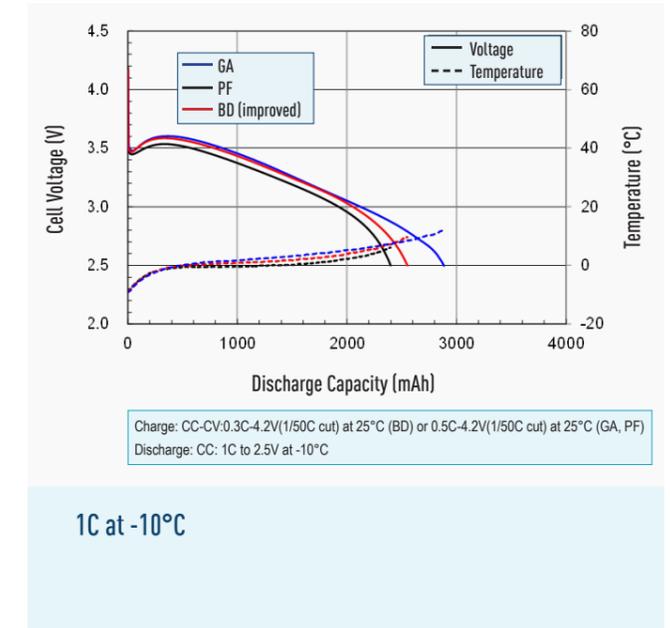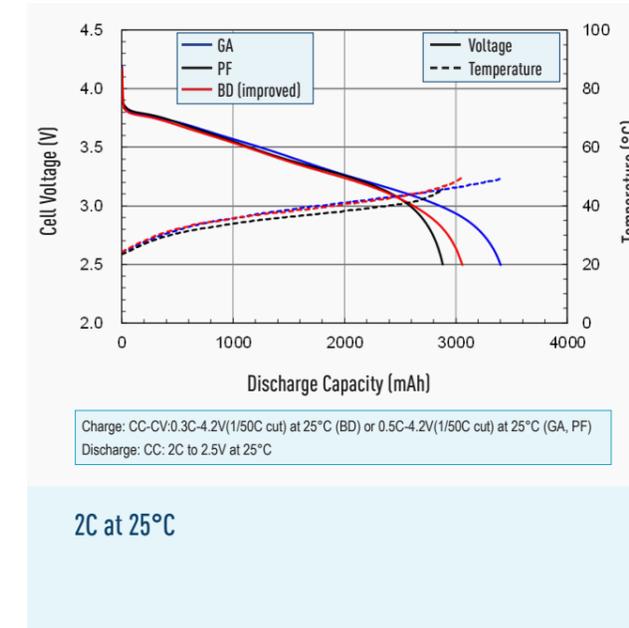

Charging and discharging over 1500 cycles

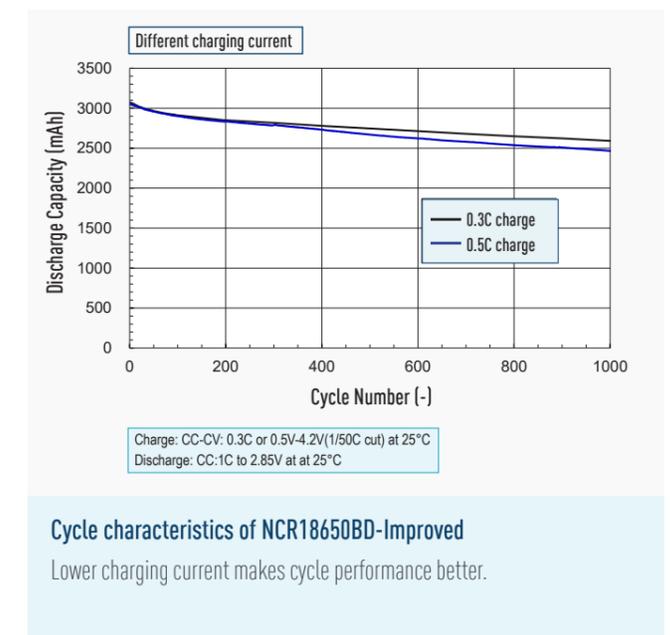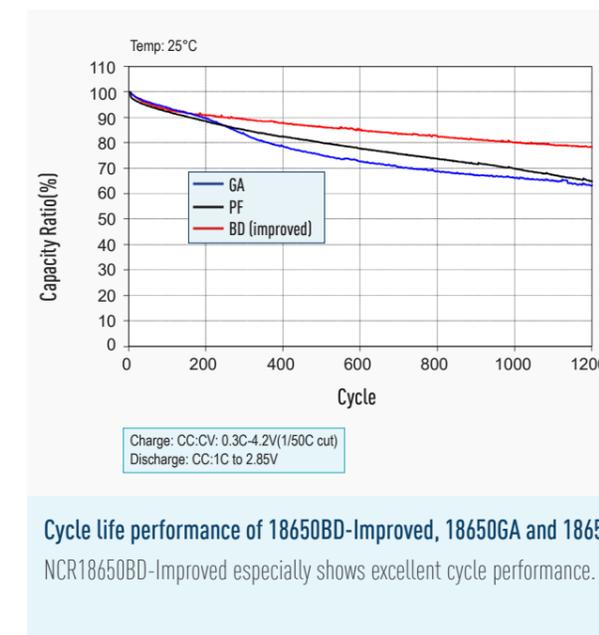

NCR18650BD-Improved: Overview of Technical Specifications



Capacity: 3080mAh (0.2It@25°C)

- Higher vs NCR-18650PF @ 4.2V Higher vs NCR-18650GA @4.2V after 400 cycles @1It Discharge Current
- Higher vs NCR-18650GA @4.2V after 400 cycles @1It Discharge Current



Charging and Discharging

- Charging Current: Up to 0.5C, Impact limited to 200mAh loss (vs 0.3C) after 1000 cycles
- Discharge: 8A Type



Cycle Performance: 1500 cycles > 81% Initial Capacity (1It@25°C)

- 5% more vs NCR-18650PF
- Remaining Capacity after 1500 cycles + 600mAh vs NCR-18650GA



Low Temperature Performance: 2200mAh (1It@-20°C)

- 71% vs Initial Capacity @25°C




Safety: No Need to check SOH or control Charging Voltage*

- Cheaper Charging system for same safety level vs NCR-18650PF or NCR-18650GA @4.2V

* Please refer to page 1

Application areas

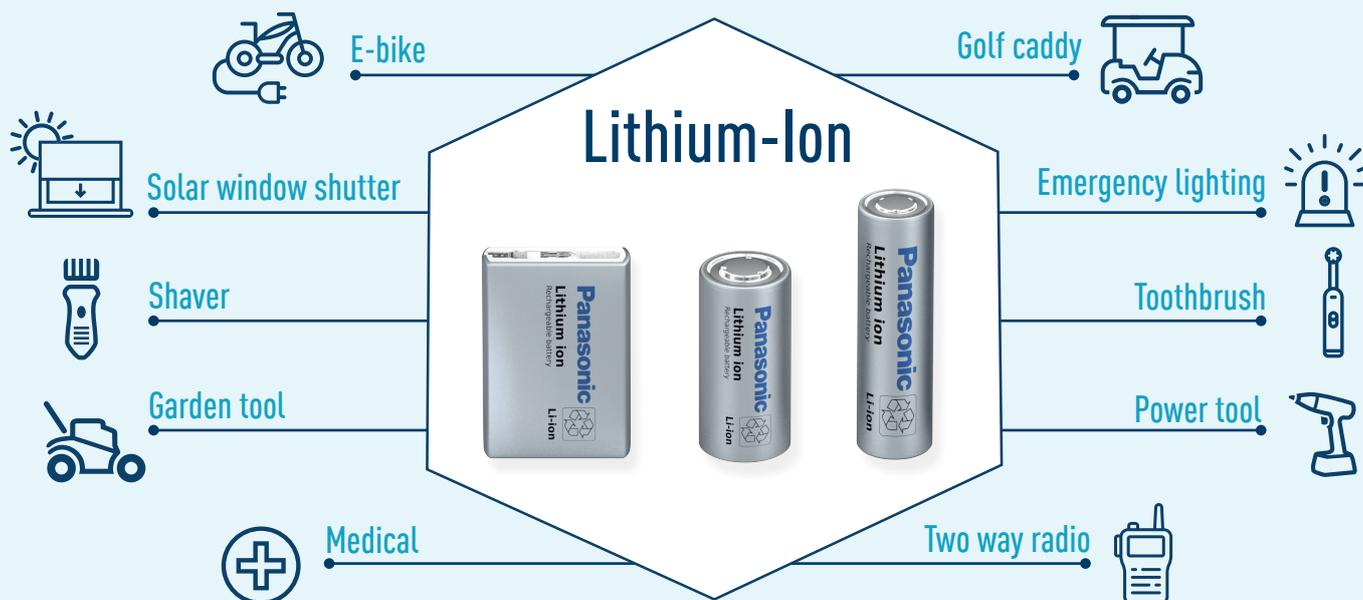

For more technical information,
please use this email:
battery-solutions@eu.panasonic.com

Panasonic Industry Europe GmbH
Winsbergring 15
22525 Hamburg, Germany
Phone: +49 40 8549-6373

Panasonic
INDUSTRY